




# TRLR800Z

## MQ POWER Tandem Axle Trailer

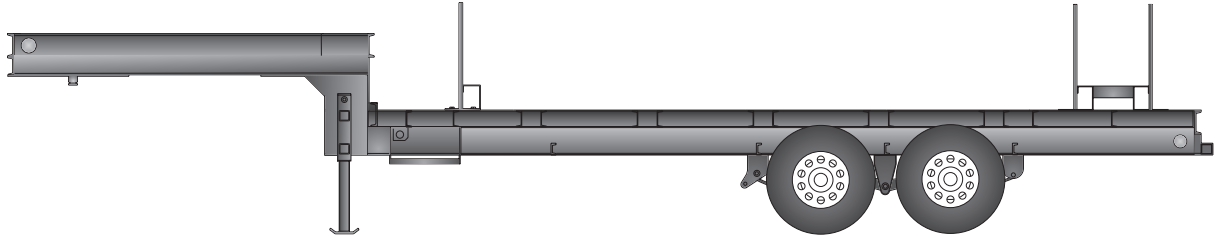

<i>TRLR800Z Technical Data</i>	
Gross Vehicle Weight Rating (GVWR) — 50,000 lbs (22,680 kg)	Tire Size — 235/75R17.5 LR-J (18-Ply Rating)
Gross Axle Weight Rating (GAWR) — 22,500 lbs (10,206 kg) (ea.)	Wheel Bolt Pattern — 10 Lug
King Pin Load — 18,500 lbs (8,391kg) max.	Tire Load Rating — 5,675 lbs (dual)

### STANDARD TRAILER EQUIPMENT

- Fits MQ Power Generator Models DCA600SSVC, DCA800SSK2C
- Tandem-axle Dual Wheel Design with Leaf Spring Suspension
- H.D. Welded Steel Frame Construction
- Structural Channel for Generator Mounting and Support
- Tandem Jacks with 2-Speed Mechanism; 50,000 pound Capacity
- Air Braking System with ABS
- Acid Phosphate Pre-wash with Polyurethane Top Coat Paint Process
- D.O.T. Approved Tail Lamps, Stop Lamps, Turn Signal Lamps, Side Marker Lamps
- Front and Rear Easy Step Access with Handrails on Both Sides
- Emergency Spring Brake Parking Feature




# TRLR800Z

## MQ POWER Tandem Axle Trailer

### OPTIONAL TRAILER EQUIPMENT

- Spare Tire with Locking Mount
- 1,000 Gallon Fuel Cell DCA600SSVC - UL142 Certified Double-wall Steel Design
- 1,250 Gallon Fuel Cell DCA800SSK2C - UL142 Certified Double-wall Steel Design
- Guard Rail System

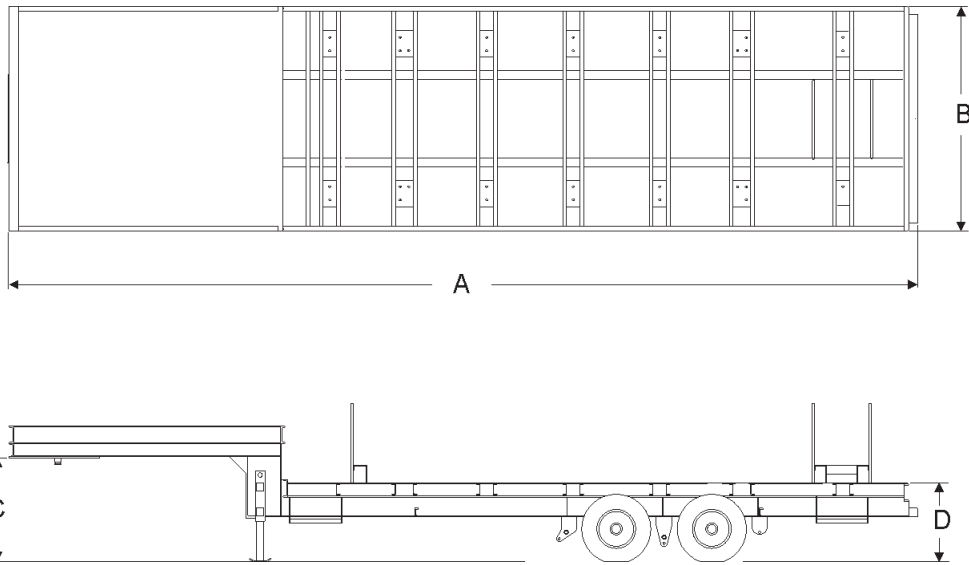

Trailer Dimensions			
A	B	C	D
414 in. (10.5 m)	102 in. (2.6 m)	47 in. (1.2 m)	35.5 in. (0.9 m)

Trailer Weight		
Without Fuel	With 1000 Gal. Fuel Cell	With 1250 Gal. Fuel Cell
9,420 lbs. (4,273 kg)*	10,585 lbs. (4,801 kg) for DCA600SSVC	13,488 lbs (6,118 kg) for DCA800SSK2C

\*Weight is approximate



© COPYRIGHT 2014 MULTIQUIP INC.  
TRLR800Z Rev. #6 (01/24/14)



1741 East Colon Street, (zip 90744)  
PO Box 1212  
Wilmington, CA 90748-1212  
Phone: 310 835-3161 • Fax: 310 518-3019  
sales@assocpower.com • www.assocpower.com